



leaders in quality, building on strength

# Fastfloor

bmi is the industry leader for design innovation and durability. Ranging from 70 CuM to 100 Cum (90-130 CU Yards) all bmi open-top Fastfloor trailers are built to the same sturdy, tried and tested design that delivers time and time again.

bmi works closely with a series of independent service centres throughout the UK and Ireland, enabling us to keep your downtime to an absolute minimum

- Constructed from Hi-Grade aluminium, snap-lock panels, upto 25 tonne payload
- Robust body construction using high grade aluminium materials
- Flush rear door with rear lights protected
- 2 minute 30s off-loading time for increase productivity
- Low centre of gravity from increased dynamic stability
- 2 pac paint finish
- 2 year structural warranty



bmi

bmi trailers Ltd. 97 Moy Road, Dungannon, Co Tyrone, N. Ireland BT 71 7DX  
Tel: +44 (0) 28 8778 9999 Web site [www.bmitrailers.co.uk](http://www.bmitrailers.co.uk)

## Body Capacity

- 90 Cu Yds to 126 Cu Yds (70 CuM to 97 CuM)

## Standard features

- Constructed from hi-grade aluminium, snap-lock panels
- Designed with strength and payload in mind
- Rear lights protected from damage
- Lower center of gravity for safety
- Full width chassis & axle track for stability
- 2 pac paint finish for protection
- EBS braking system with full data-logger feature

## Strength by design


- Substantial top rail to prevent side wall deformation
- Side uprights spaced at 500mm (20") for extra strength
- Abrasive resistant wear plate. (400 Brinell grade)

## Options

- Engine Powerpack / VM / Lomardini / Hatz
- 1/2 net manual / hydraulic sheeting system
- 1 piece hydraulic sheeting system
- Payload weighing system
- Nameboards for livery
- Lifting Axle with auto drop feature
- Roll stability program for extra safety

## Controls

- Manual / Pneumatic over hydraulics / in-cab controls
- 2 handed rear door controls to PM 52 Standard
- Remote control option for all functions

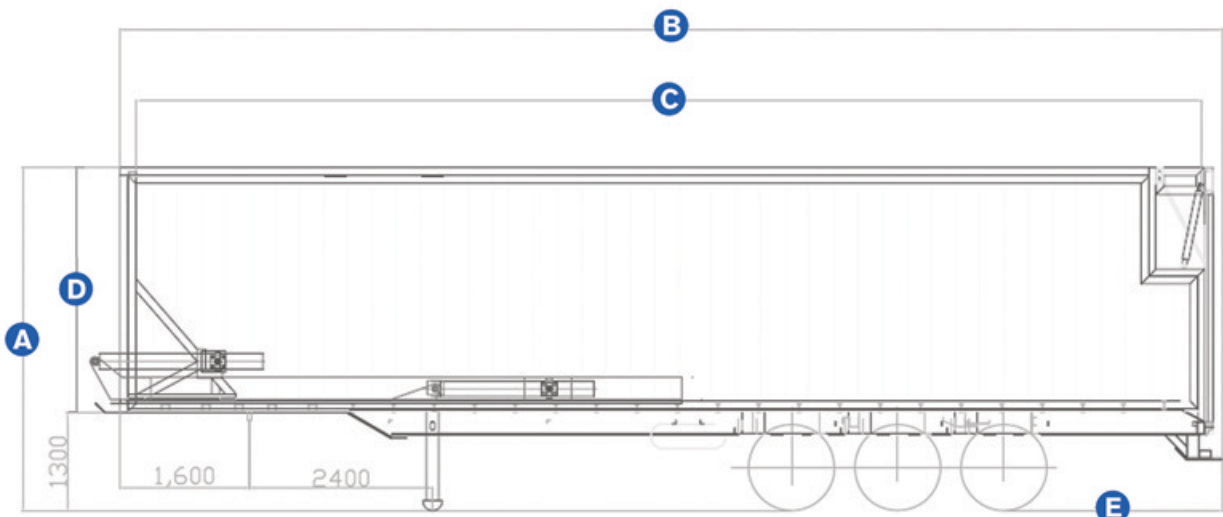

	FastFloor	FastFloor	FastFloor
<b>Trailer type</b>	110	120	130
<b>Capacities (cubic yard)</b>	84	92	99
<b>Dimensions</b>		(mm)	
<b>A</b> Overall height (mm)	3985	4230	4475
<b>B</b> Overall body length (mm)	13600	13600	13600
<b>C</b> Usable body length (mm)	13138	13138	13138
<b>D</b> Internal height (mm)	2667	2914	3162
<b>E</b> Rear overhang (mm)	2697	2697	2697
Chassis beam centres (mm)	1300	1300	1300
Internal width (mm)	2380	2380	2380
Overall trailer width (mm)	2540	2540	2540
Axle track (mm)		ROR 2100	
		SAF 2095	
		Diamler Chrysler 2095	
		BPW 2090	